


Roof Curb

The RC insulated roof curb is formed and welded from 16ga galvanized material with wood nailer attached to top. A rigid 1 1/2" 3# insulation is attached to inside of curb for thermal and acoustical properties. The bottom of the curb has a 2" flange out on all 4 sides to secure and seal up easily when roofing material is applied.

Roof Curb

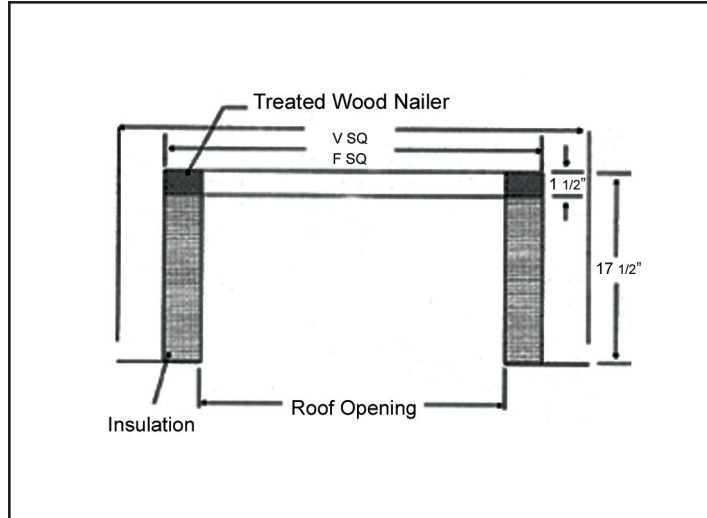

Standard Construction Features:

16 GA galvanized steel
1-1/2", 3 lbs Density thermal and acoustical insulation
Continuously welded corners
Wood Nailer

Options: Damper Tray

No Wood Nailer (deduct 1-1/2" for actual height)

Sizes that increase or decrease available.

Other Sizes available.

SMP Part #	F SQ.	V SQ.	Roof Opening
RC16	16	20	13
RC18	18	22	15
RC20	20	24	17
RC22	22	26	19
RC24	24	28	21
RC26	26	30	23
RC28	28	32	25
RC30	30	34	27
RC32	32	36	29
RC34	34	38	31
RC36	36	40	33



Standard Metal Products Mfg. LLC

DAMPERS & LOUVERS FOR THE HVAC INDUSTRY
 P.O. Box 32610 8030 Ranchers Road NE Minneapolis, MN 55432 763.783.7173 (P) 763.785.6977 (F) 1.800.297.9360